

5500 Series manifold, UL certified

BEBCO EPS®

5500-MAN-CDUL-*



- Suitable for Class I, II/Div. 2 for hazardous locations
- Certified for UL
- Manifold combines the solenoid valve for purging and needle valve for pressurization in one housing
- Suitable for steel or plastic tubing
- Mounting hardware, pneumatic fittings and tubing included



Function


The 5500-MAN-CDUL-* combines a solenoid valve for purging and a needle valve for pressurization in one manifold design. When the valve is energized, the solenoid valve opens and allows for a high flow rate of protective gas into the enclosure. When the valve is deenergized, the flow through the internal needle valve is adjustable by using the included Hex key. The solenoid valve is used for purging, leakage compensation, and temperature control by signals from user defined points on the 5500 control unit.

Mounting hardware includes 3/8" tube compression fittings mounted on the manifold for input and output flow, 3/8" tube compression bulkhead fitting for getting flow into the enclosure and certified sealing washers with bolts to mount the manifold to the enclosure. Also included is 1 meter of 3/8" poly tubing with 3/8" poly tube stiffener inserts which allows the connection of plastic tubing to compression fittings without collapsing the tubing.

For NEC, ATEX and IECEx applications see the model number key for proper manifold selection.

The 5500 valve system works with the 5500 control unit and EPV-5500 vents. The 5500 system has UL certification for Class/Division installation.

Dimensions

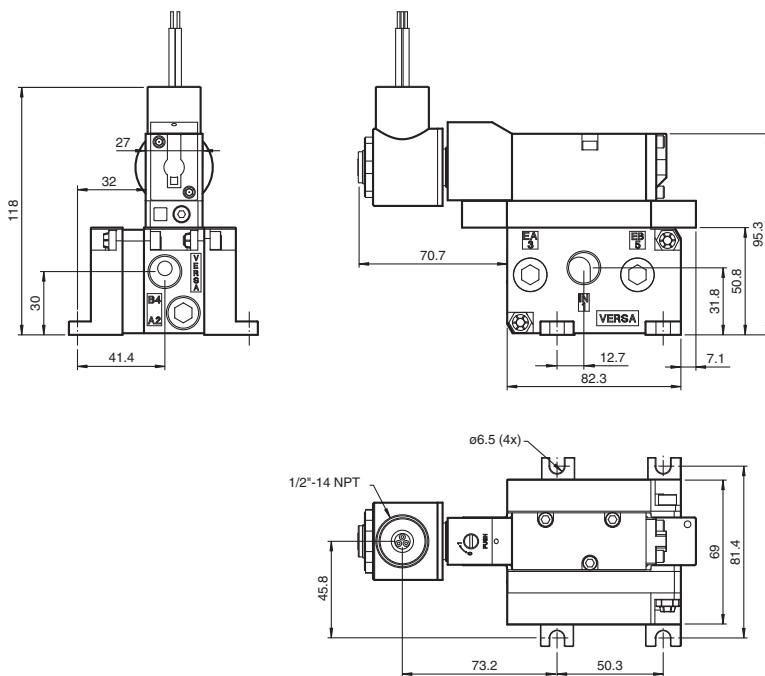

Technical Data

General specifications

Operating mode	automatic purging
----------------	-------------------

Technical Data

Series	5500
System	Type Z Purge
Hazardous environment	gas or dust
Supply	
Rated power	24 VDC: 5.6 W 120 VAC: 7.2 VA, 60 Hz 230 VAC: 7.2 VA, 60 Hz Voltage tolerance: +/-10%
Electrical specifications	
Fuse rating	DC: 500 mA AC: 80 mA (fuse rating on 5500 control unit)
Pneumatic parameters	
Protective gas supply	instrument grade air or inert gas
Pressure requirement	1.7 bar (25 psig) to 8.0 bar (115 psig)
Purge flow rate	solenoid valves : Cv (flow coefficient) = 1.4 needle valve : Cv (flow coefficient) = 0.24
Ambient conditions	
Ambient temperature	-20 ... 40 °C (-4 ... 104 °F)
Mechanical specifications	
Connection type	Pneumatic Input port: 3/8 inch Tube compression fitting Output port: 3/8" Tube compression fitting Electrical connection 1/2" NPTF thread connection w/ 24" (0.61m) flying leads
Degree of protection	type 7 & 9
Material	Housing: anodized aluminum 3/8" compression fittings: 316 stainless steel Pressure ports: 3/8" NPTF Bulkhead fitting: 316 stainless steel Mounting bolts: 1/4 - 20, 316 stainless steel Sealing washers: UL recognized type 4X
Mass	1250 g (2.8 lb)
Dimensions	see dimensions
International approvals	
UL approval	
cULus	Class I Division 2, Group A-D, T3C Class II Division 2, Group F+G, T3C

Type Code

5	5	0	0	-	M	A	N	-	E	X	0	1	-	2	4	V	D	C
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Voltage Requirement

24VDC

120VAC

230VAC

Type of Approval

EX01 ATEX and IECEx certification

CD01 FM certification

CDUL UL certification (different body design)

Valve Type

MAN Manifold (includes purging and pressurization valves)

Type of System

Type Z & Ex pz, Zone 2 & 22, NEC Class I & II / Division 2