



7500 Series Mounted Control Unit, Type Z and Ex pzc

7500-MTD-PMRW-01

- Must be used in conjunction with an EPV-7500-* vent
- Panel mount, rectangular box
- Universal power: AC or DC
- Touch screen display with LEDs for easy visual indication
- Easy setup with pre-set purge programs for your application
- Automatic pressure compensation with digital manifold
- Rugged, corrosion-resistant housing
- Global third-party approvals for Class I, II, Div. 2 and Zone 2/22
- Manual valve, no electrical power requirement
- Purge and pressurization valving in one device

Type Z & Ex pzc purge and pressurization system, panel mount, rectangle box



Function

The 7500 series panel/external mount purge and pressurization system consists of a control unit and a 7500-MAN-MV-01 manual manifold mounted to a panel.

The control unit's menu-driven touch screen display makes it easy to select pre-programmed and user-selected variables. The display has 4 LED indicators that allow users to determine system condition from a distance. See the 7500 control unit datasheet for technical data.

The 7500-MAN-MV-01 manifold combines in one compact housing a ball valve for purging and a needle valve for pressurizing an enclosure.


The ball valve has a handle for easy actuation. To provide security and prevent tampering, the needle valve requires a slot-head screwdriver to set the enclosure pressure. See the 7500-MAN-MV-01 manifold datasheet for technical data.

The 7500 series system has NEC, CE Code, ATEX, CCC, and IECEx third-party certifications for Class I, II/Div. 2 Type Z and Zone 2/22 Ex Ppc.


Connection

Electrical Connections


Terminal Block

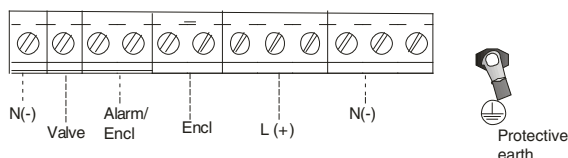

Terminal Block Connections

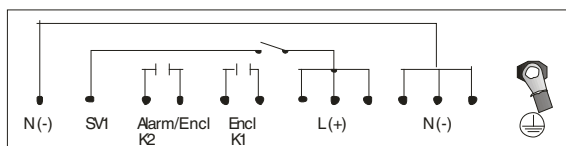

Dimensions

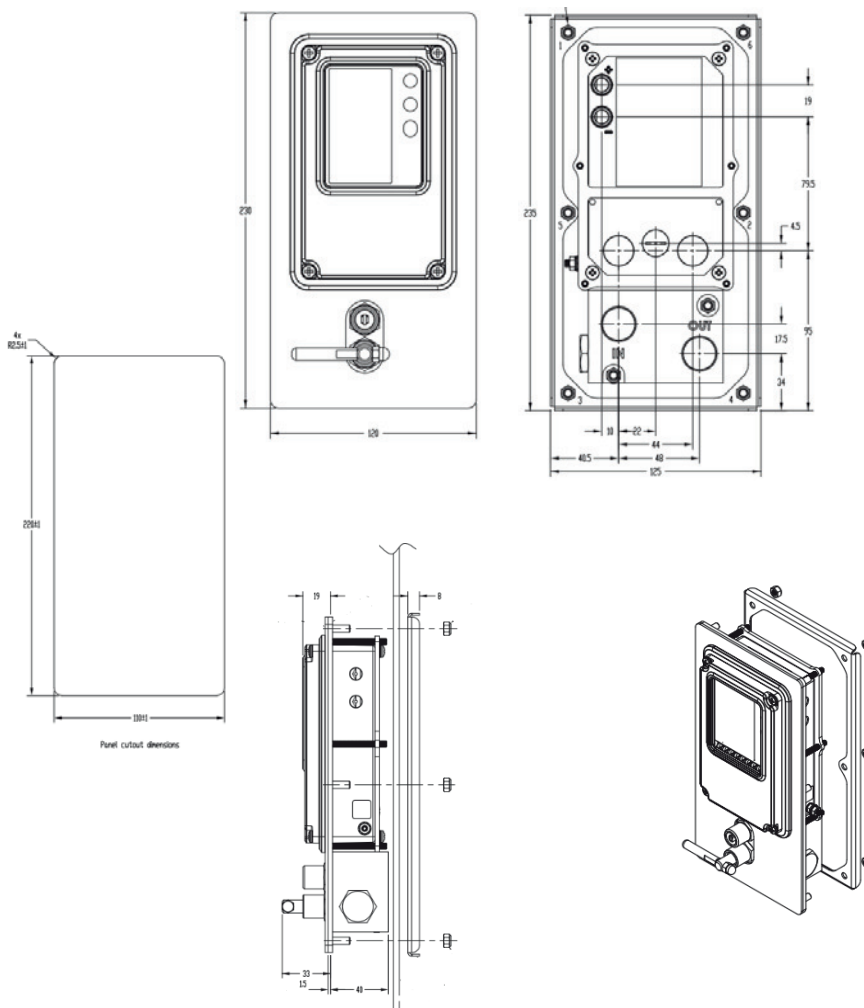

Technical Data

General specifications

Equipment architecture	max. enclosure size 12.7 m ³ (450 ft ³) For complete technical data, see the 7500 Control Unit and 7500-MAN-MV-01 datasheets
Operating mode	fully automatic (FA)
Series	7500
System	Type Z Purge ; Ex pzc Purge
Hazardous environment	gas or dust

Supply

Rated voltage	U _r	20 ... 30 V DC at 0.1 A 90 ... 250 V AC , 50 ... 60 Hz at 0.04 A without solenoid valve Supply voltage can be line-to-line or line-to-neutral, single phase OVC II
Power consumption		max. 2.7 W / 7.3 VA without valve

Electrical specifications

Connection	screw terminals -- see manual for specifications on wire size and torque values
------------	---

Output

Output I	
Connection	K1, terminals, 1 x NO
Output type	enclosure power contacts
Contact loading	5 A at 250 V AC , 5 A at 30 V DC, relays must be externally fused inrush current: 50 A

Technical Data

Output II		
Connection		K2, terminals, 1 x NO
Output type		alarm and control contacts
Contact loading		5 A at 250 V AC , 5 A at 30 V DC, relays must be externally fused inrush current: 50 A
Output III		
Connection		SV1, terminals, L1 powered contact
Output type		solenoid manifold, contact
Contact loading		0.5 A at 250 V AC , 0.5 A
Indicators/settings		
LED indication		K1: Green - Contact K1 is energized (enclosure contacts) K2: Amber - Contact K2 is energized (alarm/control contacts) P/SV: Blue - Safe pressure P1 (minimum enclosure pressure) P/SV: Amber - Solenoid manifold is energized (purging/pressure compensation)
Pneumatic parameters		
Protective gas supply		compressed air or inert gas, 40 µm filter, free from oil
Pressure requirement		supply pressure: 1.4 ... 8.2 bar (20 ... 120 psig)
Safe pressure		P1 for gas: 0.30 mbar (0.12 in. w.c.) P2 for dust: 1.29 mbar (0.52 in. w.c.) P2: 1.99 mbar (0.8 in. w.c.) P3: 6.22 mbar (2.5 in. w.c.) P4: 11.2 mbar (4.5 in. w.c.)
Enclosure pressure		0 ... 12.9 mbar (0 ... 5 in wc)
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013
RoHS		
Directive 2011/65/EU (RoHS)		EN IEC 63000:2018
Conformity		
Electromagnetic compatibility		EN 61326-3-2:2008, EN 61000-6-2:2005
Emitted interference		FCC CFR 47, part 15, subpart B: 2017 , ICES-003, Issue 6:2016, Class A ITE
Ambient conditions		
Ambient temperature		-40 ... 50 °C (-40 ... 122 °F) at T6 -40 ... 65 °C (-40 ... 149 °F) at T5 -40 ... 70 °C (-40 ... 158 °F) at T4
Storage temperature		-40 ... 80 °C (-40 ... 176 °F)
Relative humidity		5 ... 90 %, non-condensing
Altitude		max. 2000 m
Vibration resistance		5 ... 100 Hz , 1 g, 12 m/s ² , all axes
Impact resistance		30 g, 11 ms, all axes
Mechanical specifications		
Connection type		electrical: 2 x 1/2 inch NPTF (open from factory) 1 x M12 opening (plugged from factory) pneumatic: high-pressure port - 1/8 in NPTF, low-pressure port - 1/8 in NPTF
Degree of protection		Mounting to enclosure Type 4X / IP66
Material		Lens: Makrolon® GP-V polycarbonate Screws: AISI 316 (1.4401), 304, or 18-8 stainless steel Housing: A380, A356, or 6061-T6 aluminum Mounting gasket: Bisco® HT-800 medium cellular silicone Mounting tabs: SAE 304 stainless steel M12 plug: 6061-T6 aluminum
Mass		2.5 kg (5 lb 10 oz)
Data for application in connection with hazardous areas		
Certificate		
Marking		Ⓔ II 3 G Ex ec mc nC [pzc Gc] IIC T6...T4 Gc Ⓔ II 3 D Ex mc tc [pzc Dc] IIIC T60 °C ... T80 °C Dc
Directive conformity		


Release date: 2025-06-18 Date of issue: 2025-06-18 Filename: 516098_eng.pdf

Technical Data

Directive 2014/34/EU		IEC/EN 60079-0 , IEC/EN 60079-2 , IEC/EN 60079-7 , IEC/EN 60079-15 , IEC/EN 60079-18 , IEC/EN 60079-31 Supplements: EN 61010-1:2010
International approvals		
UL approval		
cULus		Class I, Division 2, Groups A, B, C, D T6 ... T4 Class II, Division 2, Groups F, G T6 ... T4
IECEx approval		Ex ec mc nC [pzc Gc] IIC T6...T4 Gc Ex mc tc [pzc Dc] IIIC T60 °C ... T80 °C Dc
General information		
Supplementary information		Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .

Type Code

7	5	0	0	-	M	T	D	-	P	M	S	W	-	0	1
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

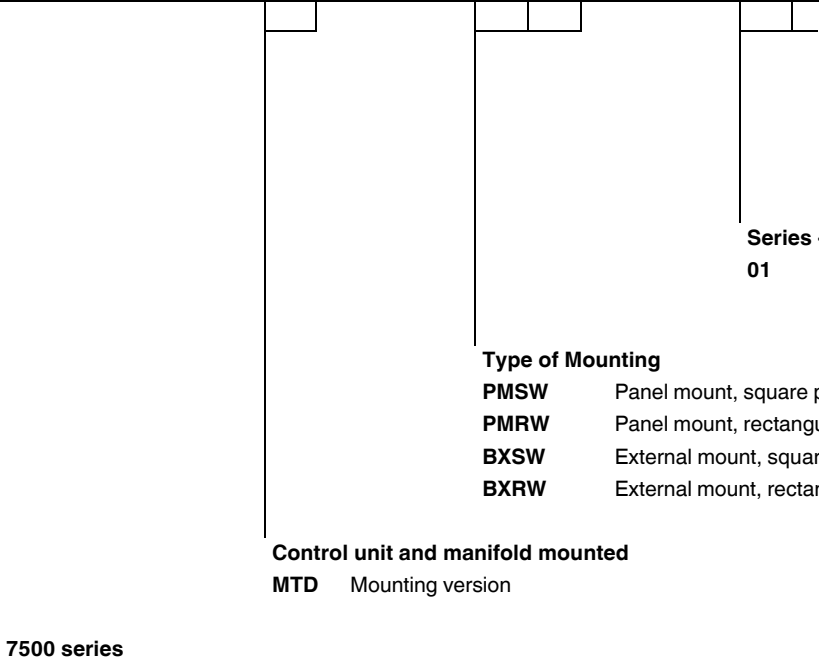

Series - option
01 standard housing type

Type of Mounting
PMSW Panel mount, square panel
PMRW Panel mount, rectangular panel
BXSW External mount, square box
BXRW External mount, rectangular box

Control unit and manifold mounted
MTD Mounting version

7500 series