



过电压抑制器 (RC-元件) 3RT1 S6, S10, S12 螺栓连接 (驱动) 127 - 240 V AC, 150 - 250 V DC

产品品牌名称	SIRIUS
产品类别	过电压抑制器
产品名称	RC 元件
RoHS 指令 (日期)	07/01/2006
重量	0.03 kg
电压类型 控制馈电电压的	AC/DC
控制馈电电压 AC 时	
• 50 Hz 时 测定值	127 ... 240 V
• 60 Hz 时 测定值	127 ... 240 V
控制馈电电压 1 AC 时	
• 50 Hz 时	127 ... 240 V
• 60 Hz 时	127 ... 240 V
控制馈电电压频率	
• 1 测定值	50 Hz
• 2 测定值	60 Hz
控制馈电电压 DC 时 测定值	150 ... 250 V
控制馈电电压 1 DC 时	150 ... 250 V
过电压限制器的结构形式	RC 元件
环境条件	
环境温度	
• 运行期间	-25 ... +60 °C
• 存放期间	-40 ... +80 °C
Environmental footprint	
环保产品声明 (EPD)	是
全球变暖潜能值 [CO2 当量] 总计	23.4 kg
全球变暖潜能值 [CO2 当量] 制造期间	0.187 kg
全球变暖潜能值 [CO2 当量] 运行期间	23.2 kg
全球变暖潜能值 [CO2 当量] 使用寿命终止后	0.014 kg
认可证书	
General Product Approval	



[Confirmation](#)



EMV	Test Certificates	Marine / Shipping
-----	-------------------	-------------------



[Special Test Certificate](#)



other	Railway	Environment
-------	---------	-------------

[Confirmation](#)

[Miscellaneous](#)

[Special Test Certificate](#)



[Environmental Confirmations](#)

更多信息

包装信息

<https://support.industry.siemens.com/cs/cn/zh/view/109813875>

Information- and Downloadcenter (产品目录, 产品介绍册, ...)

<https://www.siemens.com/ic10>

Industry Mall (网上订购系统)

<https://mall.industry.siemens.com/mall/zh/zh/Catalog/product?mlfb=3RT1956-1CD00>

Cax 在线发生器



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1956-1CD00>


Service&Support (用户手册, 操作说明书, 认证证书, 特性曲线, 常见问题,...)

<https://support.industry.siemens.com/cs/ww/zh/ps/3RT1956-1CD00>

图片数据库 (产品照片, 2D比例图, 3D模型, 设备电路图, EPLAN Makros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1956-1CD00&lang=en

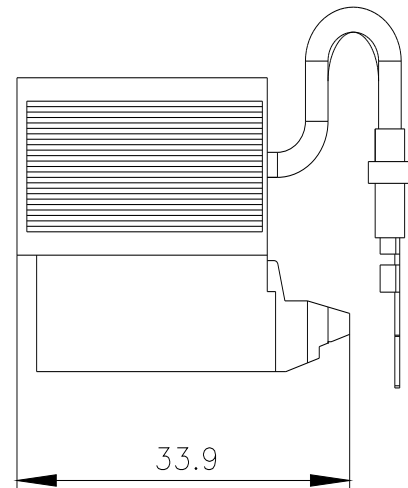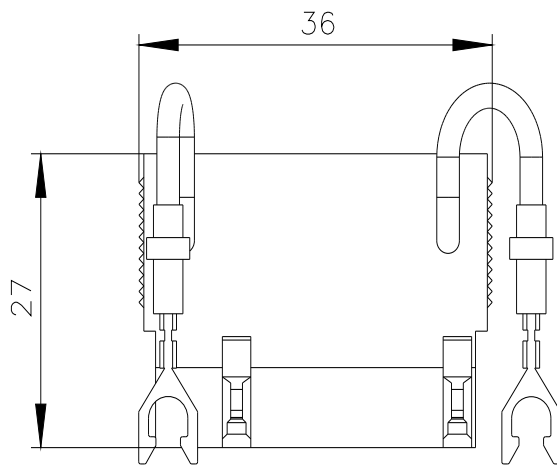

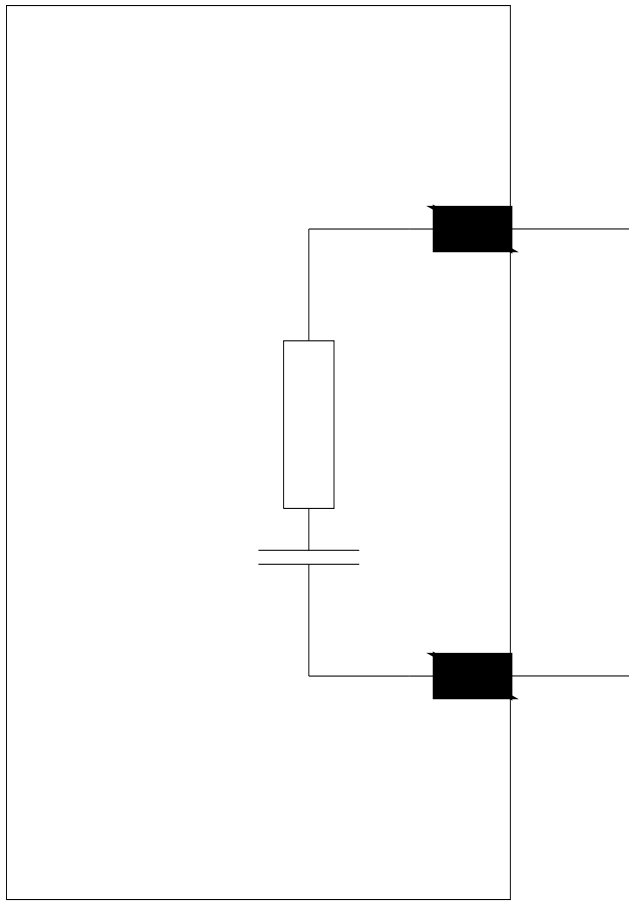

上一次修改:

2024/9/10 