


CIRCUIT-BREAKER VL160X N STANDARD BREAKING CAPACITY
 ICU=55KA / 415 V AC 4 POLE, LINE PROTECTION
 OVERCURRENT RELEASE TM, LI IN=100A, RATED CURRENT
 IR=100A, OVERLOAD II=1000A, SHORT-CIRCUIT N NOT
 PROTECTED WITH SCREW CONNECTION

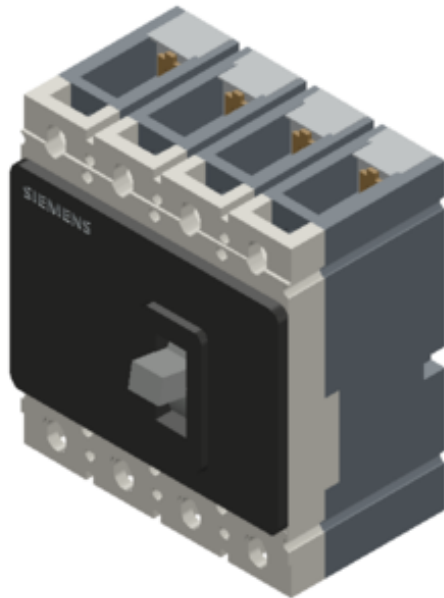

Model	
Type of the driving mechanism / motor drive	No
Design of the overcurrent release	TM
General technical data	
Number of poles	4
Size of the circuit-breaker	3VL1
Electrical endurance (switching cycles) / typical	10 000
Usage category	A
Performance class for circuit breaker	N
Mechanical service life (switching cycles) / typical	20 000
Equipment marking / acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750	Q
Operating frequency / maximum	120 1/s
Voltage	
Rated operational voltage Ue / max.	690 V
Insulation voltage	
• rated value	800 V
• at AC / rated value	800 V

Surge voltage resistance / rated value	8 kV
Protection class	
Protection class IP	IP20
Protective function of the overcurrent release	LI
Electricity	
Continuous current / rated value	100 A
Derating temperature / for the rated value of the continuous current	50 °C
Adjustable pick-up value current	
<ul style="list-style-type: none"> • of the current-dependent overload release / Full-scale value 	100 A
<ul style="list-style-type: none"> • of instantaneous short-circuit trip unit / initial value 	1 000 A
<ul style="list-style-type: none"> • of instantaneous short-circuit trip unit / Full-scale value 	1 000 A
Main circuit	
Operating frequency	
<ul style="list-style-type: none"> • 1 / rated value 	50 Hz
<ul style="list-style-type: none"> • 2 / rated value 	60 Hz
Operating voltage	
<ul style="list-style-type: none"> • for main current circuit / at AC / at 50 Hz / maximum 	690 V
<ul style="list-style-type: none"> • for main current circuit / at AC / at 60 Hz / maximum 	690 V
<ul style="list-style-type: none"> • for main current circuit / at DC / maximum 	500 V
Operating current	
<ul style="list-style-type: none"> • at 40 °C / rated value 	100 A
<ul style="list-style-type: none"> • at 50 °C / rated value 	100 A
<ul style="list-style-type: none"> • at 55 °C / rated value 	93 A
<ul style="list-style-type: none"> • at 60 °C / rated value 	93 A
<ul style="list-style-type: none"> • at 65 °C / rated value 	86 A
<ul style="list-style-type: none"> • at 70 °C / rated value 	86 A
Suitability	
Suitability for use	system protection
Adjustable parameters	
Adjustable pick-up value current / of the current-dependent overload release / initial value	100 A
Product details	
Product component	
<ul style="list-style-type: none"> • Trip indicator 	No
<ul style="list-style-type: none"> • Auxiliary switch 	No

• Voltage trigger	No
• undervoltage release	No
• undervoltage release with leading contact	No
Product extension / optional / motor drive	Yes

Product function

Product function	
• of thermal overload trip unit	fixed
• Ground fault protection	No
• for neutral conductors / Short-circuit and overload proof	No
• Overload protection	Yes

Short circuit

Operational short-circuit current breaking capacity (Ics)	
• at 240 V / rated value	65 kA
• at 415 V / rated value	55 kA
• at 500 V / rated value	14 kA
• at 690 V / rated value	4 kA
Maximum short-circuit current breaking capacity (Icu)	
• at 240 V / rated value	65 kA
• at 415 V / rated value	55 kA
• at 440 V / rated value	25 kA
• at 480 V / acc. to NEMA / rated value	25 kA
• at 500 V / rated value	18 kA
• at 600 V / acc. to NEMA / rated value	8 kA
• at 690 V / rated value	8 kA

Connections

Arrangement of electrical connectors / for main current circuit	front side
Type of electrical connection / for main current circuit	screw-type terminals

Mechanical Design

Height	157.5 mm
Width	139.5 mm
Depth	106.5 mm
Mounting type	fixed mounting

Environmental conditions

Ambient temperature	
• during operation / minimum	0 °C
• during operation / maximum	70 °C
• during storage / minimum	-40 °C

• during storage / maximum

80 °C

Certificates



Certificate of suitability

IEC, standard switching capacity (N)

Equipment marking

• acc. to DIN EN 61346-2

Q

General Product Approval	EMC	Declaration of Conformity	Test Certificates	Shipping Approval
sonstig	TSE	 C-Tick	spezielle Prüfbescheinigung n	 ABS

Shipping Approval	other
 BUREAU VERITAS	sonstig
 LRS	
 PRS	
 RINA	
 RMRS	

other
Bestätigungen Umweltbestätigung

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VL1710-1EH46-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VL1710-1EH46-0AA0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=3VL1710-1EH46-0AA0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>